


## PARTS AND COMPONENTS OF DISPLAY STAND

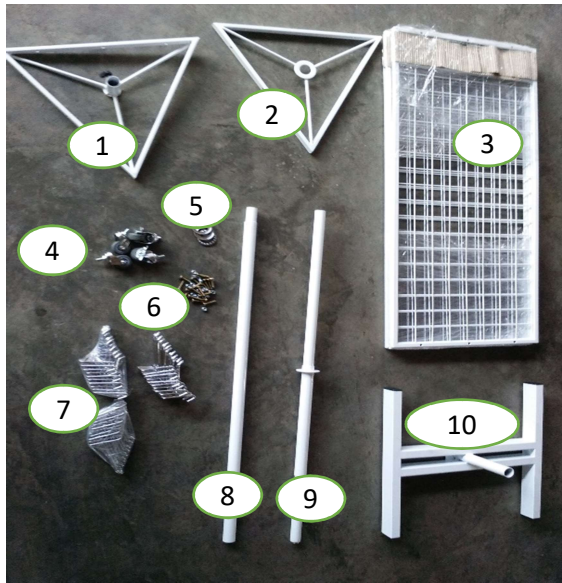

### Parts & Components

- 1) Upper Triangle
- 2) Lower Triangle
- 3) Nets (3 pcs)
- 4) Wheel (4 pcs)
- 5) Bearing (3 pcs)
- 6) Bolts & Nuts (18 sets)
- 7) Hooks (30 pcs)
- 8) Upper Pole
- 9) Lower Pole
- 10) Base

### Users need to prepare the below

- 1) Allen Keys (4mm and 5mm)
- 2) Spanner (10mm)




This is what it looks like, when you opened up boxes.



## DISPLAY STAND ASSEMBLE GUIDELINE

### Step 1: Assemble the Wheel at the Bottom of the Base

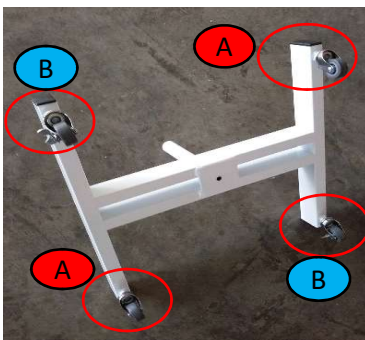

A: Wheel without lock lever

B: Wheel with lock lever

Please lock the tires when displaying the stands.



### Step 2: Fix the Bottom Pole on the Base



Remove the screw from the bottom of lower pole .



Tighten the screw from the bottom of the base.


## DISPLAY STAND ASSEMBLE GUIDELINE

### Step 3: Assemble the nets with Triangles



1) Position the side with KDS logo with the upper triangle .

**Note: Please do not tighten the screws while assembling the nets.**

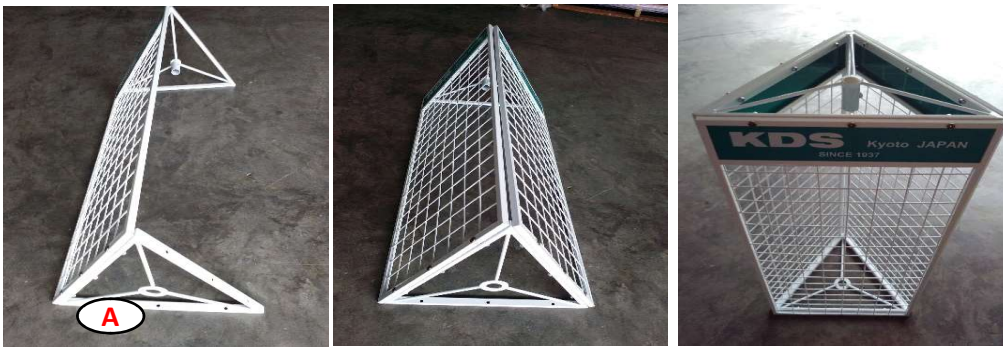

2) Fix the Bottom triangle at the other side of the net.

**A** **Note: The flat side of the ring must face outward.**

3) Assemble the rest of the nets. **At last tighten up all the screws.**

### Step 4: Fix the Upper Pole inside the Triangle Nets



Insert the upper pole into the upper triangle and tighten it with the black screw.


(Tighten the black screw after facing a hole of upper pole and the bottom of the black screw).



A hole of upper pole

## DISPLAY STAND ASSEMBLE GUIDELINE

### Step 5: Insert the Bearing into the Lower Pole

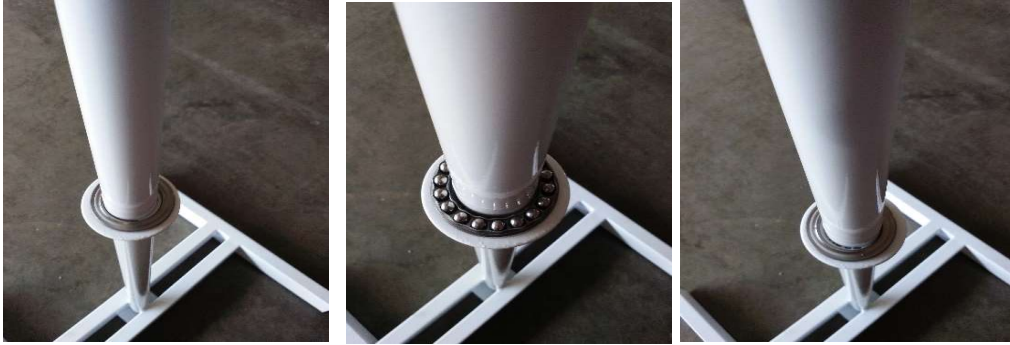

### Step 7: Place the Triangle Nets onto the Lower Pole

Final Image

Place the triangle nets onto the lower pole.  
※Be careful for not hitting it to the ceiling.  
The assemble process is completed.  
Hanging hooks can be hung on the nets  
※30 pcs of hook are included in the box.

1610mm

Lock lever

450mm

455mm

Please LOCK the tires when displaying the stands

Lock lever